


DLI-1800



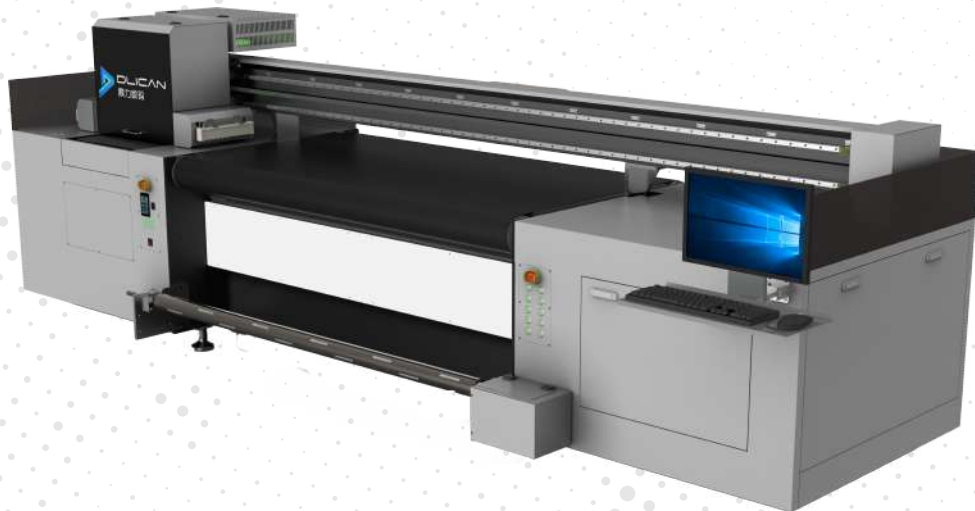

Descrizione

Nel settore della **stampa digitale**, la gestione efficiente di materiali in *rotolo* e *supporti rigidi* su un unico sistema produttivo è un fattore chiave per ampliare l'offerta senza moltiplicare le attrezzature. La stampante **DLI-1800** integra un *piano di stampa* a nastro mesh di formato **extra largo**, progettato per accogliere con stabilità sia bobine di materiale flessibile sia **pannelli rigidi**, offrendo a operatori di arti grafiche e aziende di stampa industriale una piattaforma versatile per applicazioni di grande formato.



Mode of Equipment	DLI-1800
Print head type	Konica 1024i print head/Ricoh G5 /Ricoh G6 print head
Printing color	CMYK+LCLM+W+V(Support a variety of color combinations)
Printing Height	0-50mm (can be customized)
Printing Precision	720×900DPI/720×1200DPI/720×1800DPI
Lifting function	Automatic lifting of print head / automatic monitoring of print height
Ink System	Continuous supply/ink 2000ml/subtank constant temperature and pressure/white auto stirrer
RIP Software	ColorGATE RIP Photo print Rprint, and supporting various printing software
Data interface	High speed USB transfer interface/Gigabit network interface
Driver Software	Microsoft Windows 10
Operation Environment	Temperature: 20°C - 30 °C / Humidity: 40-70%
Printer Weight	2300KG
Printing Size	Plate: 1800×2000mm/ Coil: 1800mm(max)
Print head quantitiy	4-18(And can be customized)
Curing system	UV lamp curing
Printer Dimension	4500mm×1660mm×1550mm
File format	TIFF(RGB&CMYK)BMP、PDF、EPS、JPEG、etc.
Power requirements	AC220V(±10%);50HZ;P:8000W
4pass	Single Row: 32 m²/h / Two Row: 56 m²/h / Three Row: 72 m²/h / Three Row Ricoh: 65 m²/h
6pass	Single Row: 25 m²/h / Two Row: 42 m²/h / Three Row: 60 m²/h / Three Row Ricoh: 48 m²/h
8pass	Single Row: 18 m²/h / Two Row: 30 m²/h / Three Row: 48 m²/h / Three Row Ricoh: 32 m²/h