


DLI-5300



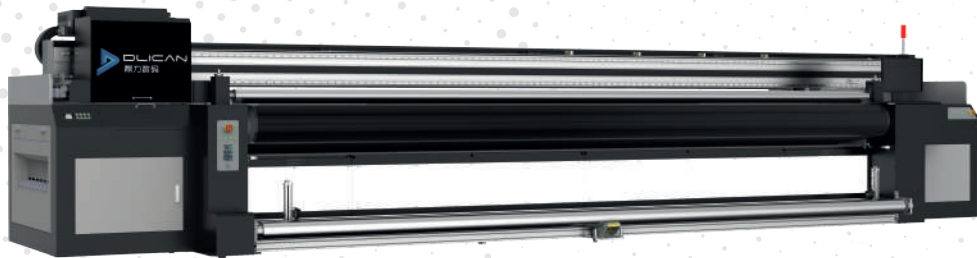

Descrizione

Nel settore della stampa di *grande formato*, la possibilità di unificare la lavorazione di supporti rigidi e materiali in rotolo su una larghezza operativa di oltre cinque metri rappresenta un salto di efficienza che incide direttamente sulla capacità produttiva. La *stampante UV ibrida DLI-5300* incarna questa convergenza, offrendo un'area di stampa fino a **5300 mm** e una *velocità massima* di **400 m²/h**, con una risoluzione **Ultra HD di 2880 dpi**.



Mode of Equipment	DLI-3325
Printing System	Flat-roll dual purpose UV printing equipment with Dlican printing technology
Image Resolution	Up to 1440 dpi
Standard Color	CMYK
Available in color	Lc, Lm, Ly, Lk, Or, Wh, Vr
UV curing technology	LED-UV Curing Technology
Image reception format	PDF, TIFF (RGB & CMYK), BMP, EPS, JPEG
RIP software system	Printfactory, Caldera, Onyx, and many other printing software
Power Supply	AC220V(±10%); 50HZ; P:10.000W
Device Dimension	8100×2000×1950
Device Weight	6800kg
Maximum print Width	5300mm
Maximum web Width	5350mm
Maximum panel Width	5200mm
Maximum Media Thickness	50mm
Draft Mode (2pass)	460 m ² /h
High-Speed Mode (4pass)	236 m ² /h
Production Mode (6pass)	156 m ² /h
Quality Mode (8pass)	138 m ² /h